



TORWASH® sewage sludge treatment

Increased biogas production, highly-efficient dewatering and phosphate recovery


A.J. Grootjes, H. Kuipers, J.R. Pels, M.C. Carbo, J. Vogelaar

Symposium slibontwatering, Utrecht
14 September 2017

Table of Contents

- Introduction to TORWASH®
- What can TORWASH® do for sewage sludge?
 - Two process diagrams
- Experimental results
 - dewatering
 - elemental distribution of elements
 - digestion of effluent
- Process configuration for maximum biogas (methane) and energy yield
- Controlling the fate of phosphorus → recovery as fertilizer

Waar het mee begon

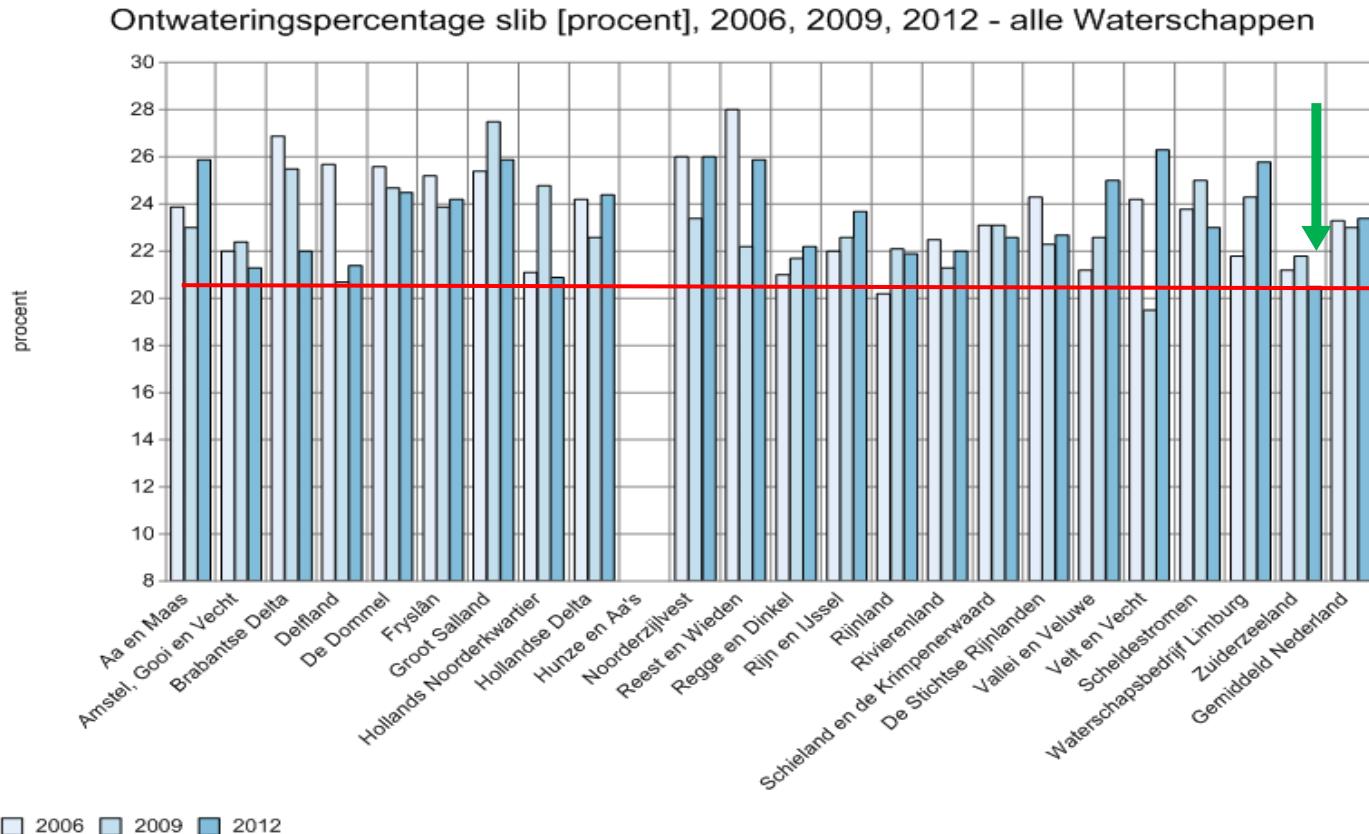

Waar het mee begon

- Bestuur ZZL wil minder en droger slib, meer duurzame energie en grondstoffen
 - 2015 1- 1,5 % droger door procesvoering
 - 2018 10% minder slib door Ephyra
 - 2018 -2020 dosering kationen ???
 - 2017-2030 groei in Flevoland
-
- ZZL na 2018 34.000 ton slibkoek, circa € 2,5 miljoen, (nu in NL circa 110 miljoen)
 - Verbetering ontwaterbaarheid minimaal
 - Er blijft altijd slib over!!

“haal eruit wat erin zit, doe datgene weg
waar je niets meer mee kan en doe dit zo
goedkoop mogelijk”

Hoe? “zo goedkoop mogelijk”

Kunnen we de hoeveelheid slib niet verder verkleinen? en is er nog een waarde aan toe te kennen?

In 2015 mogelijk het antwoord gevonden:

TORWASH® ???

ECN acts as a bridge between science and corporate innovation



Mission

We develop knowledge and technologies that enable a transition to a sustainable energy system



Not-for-profit research institute

Founded in **1955**

5 Commercial licensing deals / year

500 Employees

+/-20 patents a year

€ 80 M annual turnover




Wet torrefaction + Washing

- Upgrading of biomass feedstocks that have too much water or too much salt
- Under pressure in liquid water 150-250°C → changes in biomass structure that weaken fibres and releases water + ions
- Unique concept:
 - It enables efficient mechanical dewatering
 - It enables removal of salts to a high degree
 - Mild process conditions allow digestion of the effluent
 - ECN patent WO 2013/162355
- Goal: maximum energy in form of 2 fuels
 - Solid biomass pellets
 - Biogas from digestion of effluent
- Latest development: controlled recovery of phosphorus



TORWASH® : A multi-purpose process for green solutions

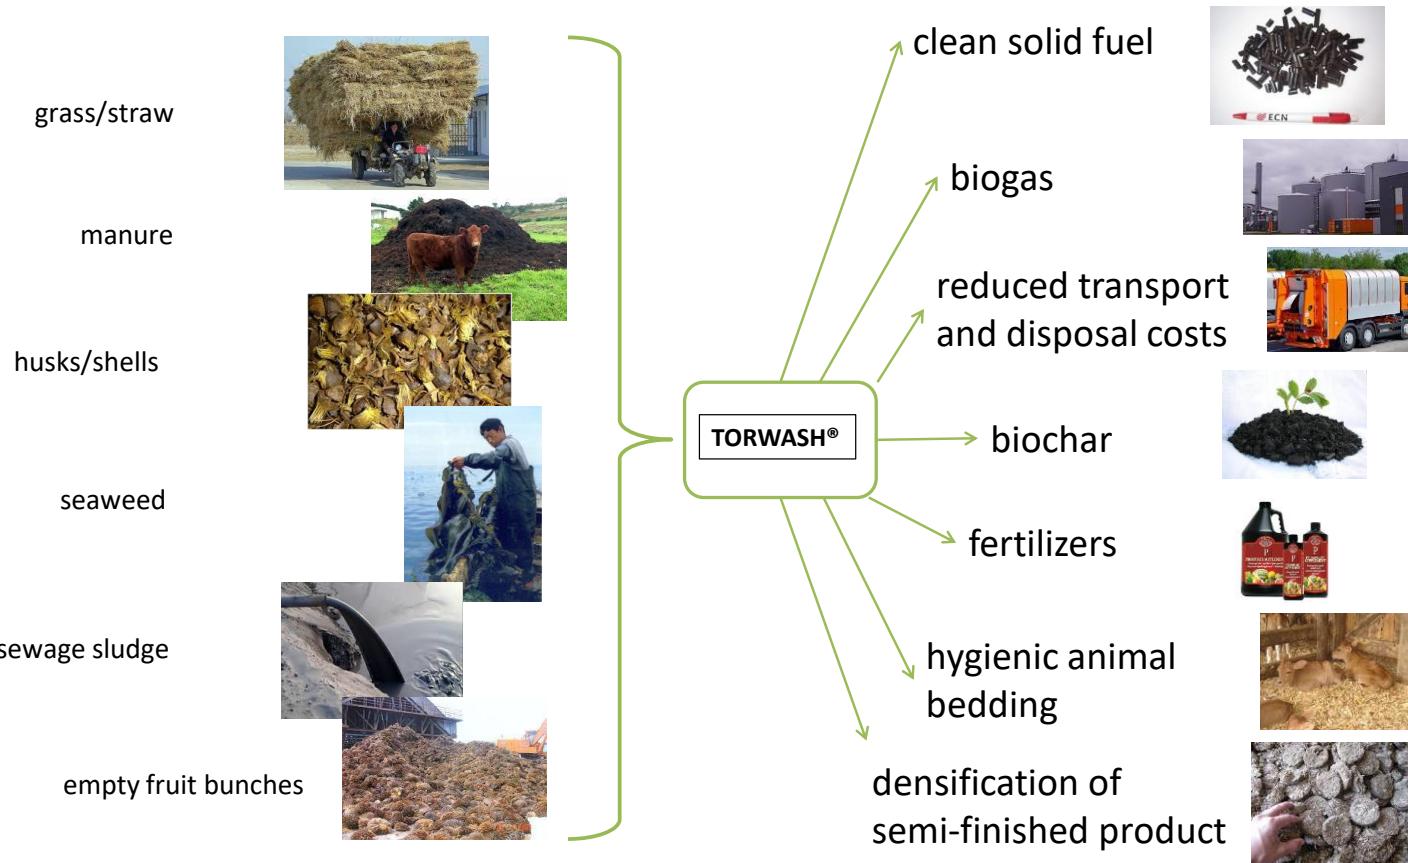

Why is TORWASH® unique?

Because:

- It enables efficient *mechanical* dewatering
- It opens up biomass and thus enables complete removal of salts
- Its mild process conditions allow digestion of the effluent to biogas
- It doesn't use additives:
 - no catalysts
 - no pH control
 - no flocculants
 - no enzymes

The TORWASH® promise

Almere as an example

	Dry matter	Volume [ton]	Disposal costs*
Centrifuge	8%	56 000	
Existing Press	21%	21 000	M€ 1.3
Best Press	24%	19 000	M€ 1.1
THP	30%	15 000	M€ 0.9
TORWASH®	65%	3 100	M€ 0.2


* € 60 per ton “as received” in all cases

repeatedly obtained for various raw materials

- Amounts of sludge reduced from 21 to 3 kton/year
- Potential savings on disposal costs € 1.1 million/year
- Additional savings when polyelectrolyte (PE) is no longer needed: € 0.2 million/year

TORWASH® → Digestion

incinerator

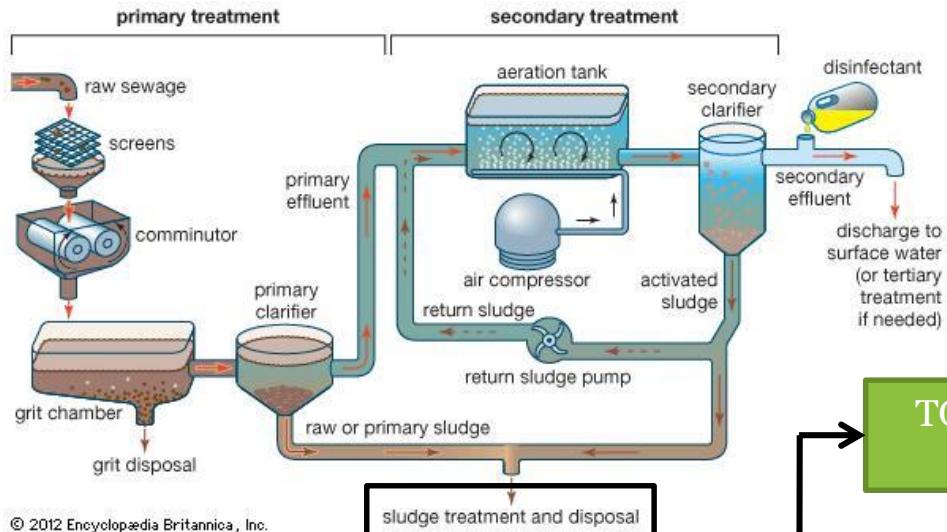

8-12 wt%
dry matter

TORWASH®
Reactor

Anaerobic Digester



Liquid Effluent
No Solids


>60 wt%
dry matter



Dewatered cake

Liquids

Digestion → TORWASH®

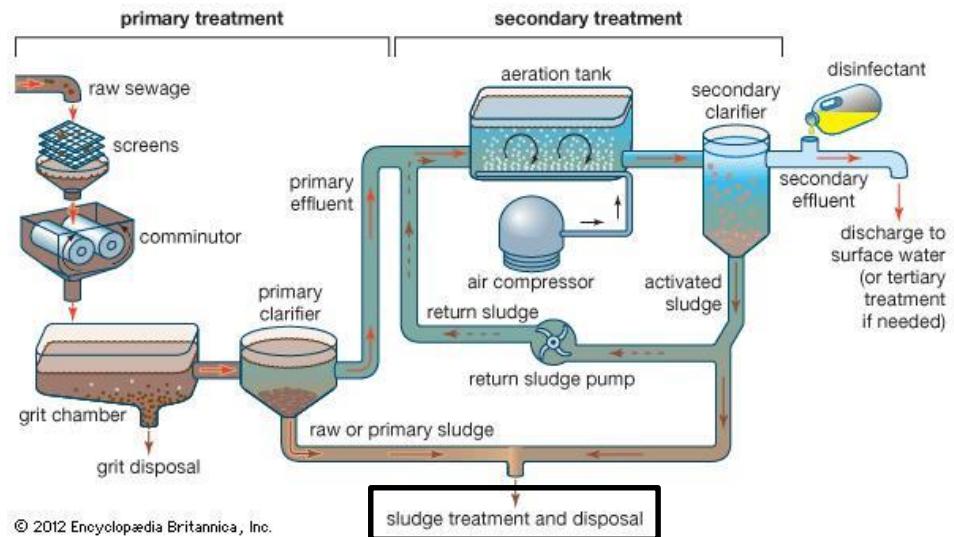


Sewage sludge

8-12 wt% dry matter



Anaerobic Digester

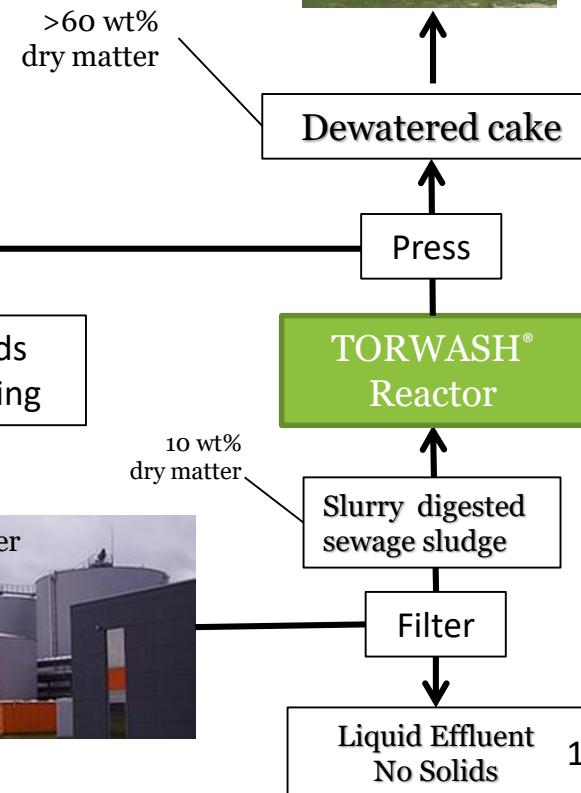

Visible effect of TORWASH®



Sludge from AWZI Almere before and after TORWASH®


- Left: untreated sludge
- Right: TORWASHed sludge

Project TORWASH® of sewage sludge

- Experimental programme
 - Two kinds of sewage sludge: digested and undigested
 - (Three kinds of manure (cows, pigs, chicken))
 - Testing in 20L autoclave with sewage sludge “as received”
 - Slurry pressed in Carver Die (2½ inch)
 - Digestion tests, batch 18-25 days


- Highly efficient mechanical dewatering
 - modern sludge presses reach 21-24% dry matter
 - manure separator: up to 20% dry matter

	Sludge	Press cake
	before TORWASH®	after TORWASH®
Undigested sludge	8-12%	67%
Digested sludge	8-12%	61%
Manure	5-20%	67%

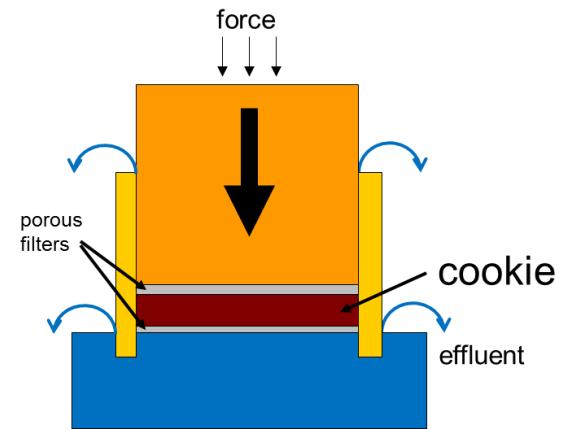

TORWASH® of undigested sludge

Distribution of elements

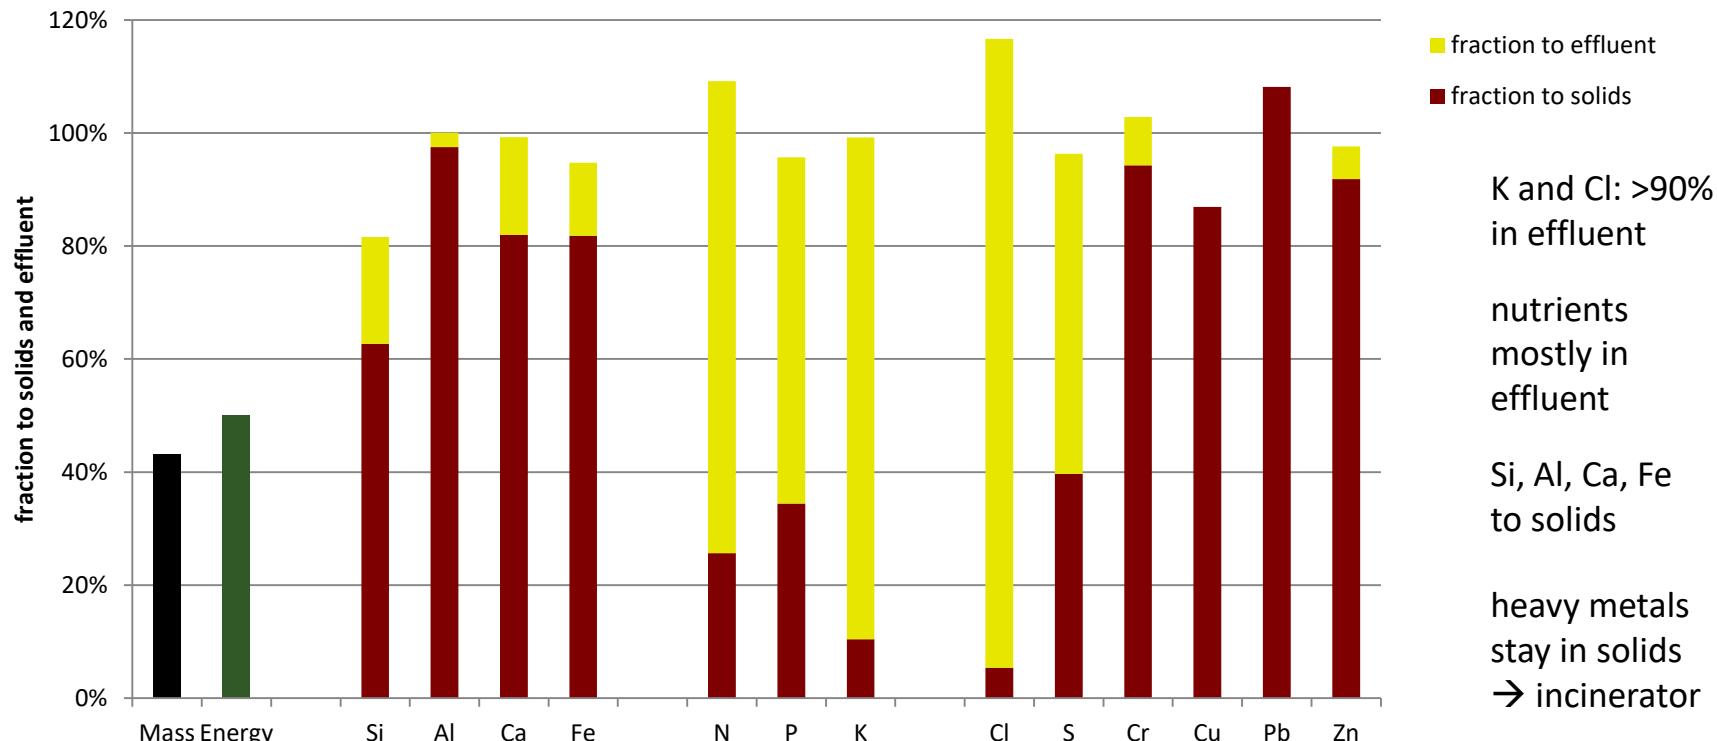

* Mass and Energy in solid product

Fuel Quality – undigested sludge



	Moisture	Ash 550°C	Ash 815°C	Volatile Matter	Calorific Value (HHV, dry)	Calorific Value (LHV, as received)
	%	%	%	%	MJ/kg	MJ/kg
Non-digested sludge – input	95	16	16	69	19	negative
Non-digested sludge – product	33	21	20	64	22	13
Wood chips	8	2.6	2.1	79	19	16
Coal mixture	3	-	12	32	24	22
	C	H	N	S		
	%	%	%	%		
Non-digested sludge – input	42	6.2	6.9	0.8		
Non-digested sludge – product	49	6.3	4.1	0.7		
Wood chips	48	6.5	0.5	0.04		
Coal mixture	72	4.5	1.4	0.85		

municipal waste
10 MJ/kg
(LHV, wet)

Values are on dry basis, except moisture





TKI-BBEG EnCORE



EnCORE (Efficiente Cascadering en Opwerking Rioolslib voor Energie-neutrale bedrijfsvoering)

Doel: Het doel is meer biogas en grondstoffen uit zuiveringsslip te produceren t.o.v. een klassieke slibvergister, door adaptatie en optimalisatie van de combinatie van een 'Upflow Anaerobic Sludge Blanket' (UASB) vergister van slib dat middels TORWASH® is voorbehandeld.



Activiteiten:

- Kleine schaal vergistingstesten
- Pilotschaal TORWASH® testen (Almere)
- Adaptatietesten effluentvergisting
- Kwantificeren fosfaat terugwinning



Na EnCORE: opschalen naar volleschaal demo


Digestion tests

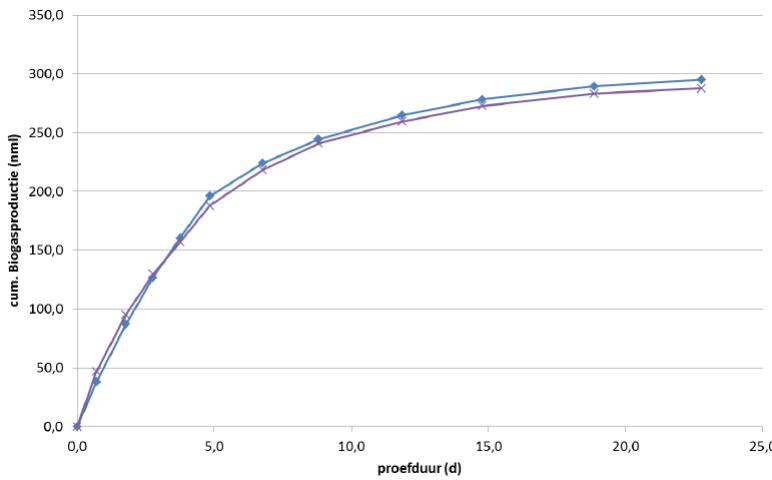

- Batch tests at OPURE
 - 18-25 days
 - Filtered effluent after TORWASH®
- Measurements
 - COD measurements before and after
 - biogas production
 - methane content → methane production
- For TORWASH® assessment purposes, digestibility is defined as the COD conversion

Digestion of TORWASH® effluent

Undigested vs. digested sewage sludge

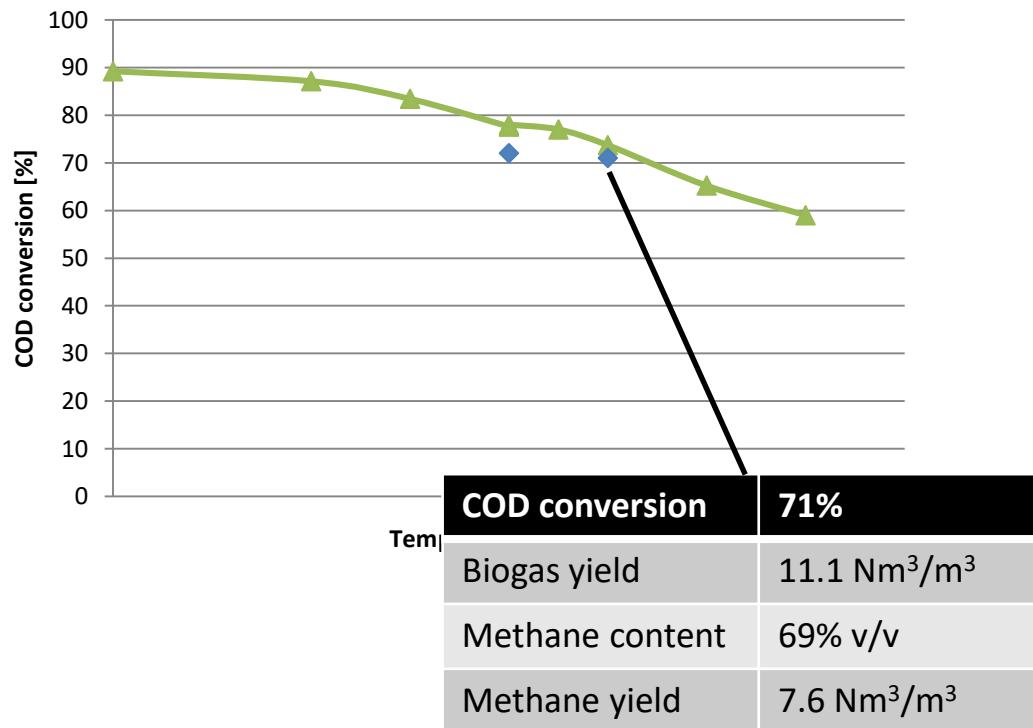

- Digestion expressed as conversion of COD
- Green = undigested sludge
- Blue = digested sludge
- Effluents equally well digestible

Methane and energy yield in different configurations

- TORWASH® + digestion of only effluent gives the same amounts of biogas as TPH + full classic digestion (= +10% compared to classic digestion)
- TORWASH® of digestate after classic digestion:
 - Digestion of effluent gives extra biogas, solid product easy to dewater

Process configuration (starting with undigested sludge)	Current situation	Classic digestion	Classic Digestion with TPH	TORWASH® → IC(X) digestion	Classic Digestion → TORWASH® → IC(X) digestion
Methane Production [Nm³/kg organic dm]	0	0.13	0.14	0.14	0.19
Dry matter content of press cake after dewatering [wt%]	21 – 24	21 – 24	max. 30	> 65	> 60
Total energy production * [MJ/kg organic dm]	2.8	6.3	7.0	11.7	12.2

P-recovery via TORWASH®

- Sewage sludge and manure contain large amounts of phosphorus
- Solubility of phosphorus changes with TORWASH® chemistry
 - Temperature is the most important parameter
- Fate of P can be controlled in TORWASH®
 - 95% P in solids is possible
 - 95% P in effluent is also possible
- Effluent from TORWASH® may contain double the amount of P compared to effluent from TPH

**ENERGIE EN
Grondstoffen
FABRIEK**

Summary

- Lab tests have been successful for both digested and undigested sludge
- Pilot TORWASH® reactor will be tested (EnCORE project)
- Main result: Sewage sludge converted into solid fuel and biogas
 - Chemical changes enable efficient dewatering and salt removal
 - Digested and undigested sludge: press cake > 60% dry matter
 - Effluent from TORWASH® digestible
 - TORWASH® of digested sludge gives extra biogas
 - Two TORWASH® process configurations that boost energy production
- Fate of Phosphorus can be controlled for recovery
 - Temperature determines fate of P and other elements



Consortium



This presentation was made in close cooperation with Water Authority
Zuiderzeeland

ECN

Westerduinweg 3

1755 LE Petten

The Netherlands

T +31 88 515 49 49

F +31 88 515 44 80

P.O. Box 1

1755 ZG Petten

The Netherlands

biomassa@ecn.nl

www.ecn.nl

